



MODEL 212

Sewage Pump

Designed for use in residential or light commercial sewage applications and can be used to transfer groundwater and sewage.



Zoeller Family of Water Solutions™

Copyright Zoeller Co. All rights reserved.

Features:

- Energy saving product
- 2-year warranty
- Reliable integrated vertical switch
- 1/2 HP 115 V sewage pump
- Performance up to 19.5' TDH
- Flows up to 82 gallons per minute
- Rugged cast iron motor housing
- Engineered plastic base
- Corrosion-resistant, powder coated epoxy paint



100% factory tested

PRODUCT SPECIFICATIONS

MOTOR	Horse Power	1/2
	Voltage	115
	Phase	1 Ph
	Hertz	60 Hz
	RPM	3400
	Type	Permanent split capacitor
	Insulation	Class B
	Amps	6.6
PUMP	Operation	Automatic
	Auto On/Off Points	11 1/2" (29 cm) / 5 1/4" (13 cm)
	Discharge Size	2" NPT
	Solids Handling	2" (50 mm) spherical solids
	Cord Length	10' (3 m) standard
	Cord Type	UL listed 3-prong plug
	Max. Head	19.5' (5.9 m)
	Max. Flow Rate	82 GPM (310 LPM)
	Max. Operating Temp.	104° F (40° C)
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload (1 Ph)
MATERIALS	Motor Housing	Cast iron
	Pump Housing	Engineered plastic
	Base	Engineered plastic
	Upper Bearing	Ball bearing
	Lower Bearing	Ball bearing
	Mechanical Seals	Carbon and ceramic
	Impeller Type	Non-clogging vortex
	Impeller	Engineered plastic
	Hardware	Stainless steel
	Motor Shaft	SUS420J2 stainless steel
	Gasket	NBR

NOTE: The sizing of effluent systems normally requires variable level float(s) controls and properly sized basins to achieve required pumping cycles or dosing timers with nonautomatic pumps.

NOTE: See model comparison chart for specific details.

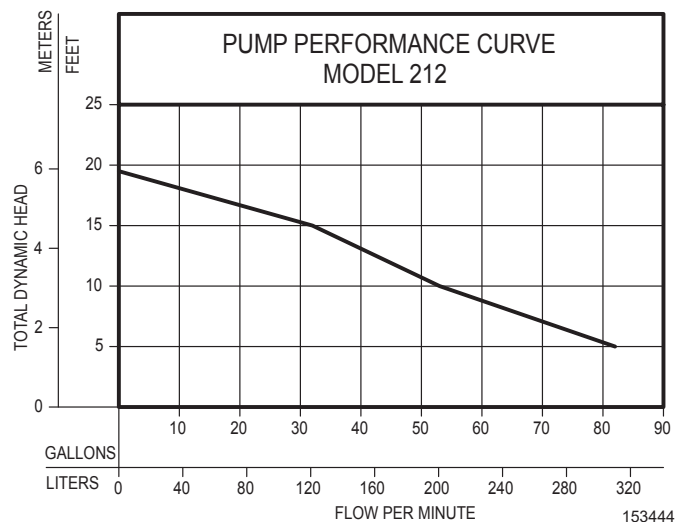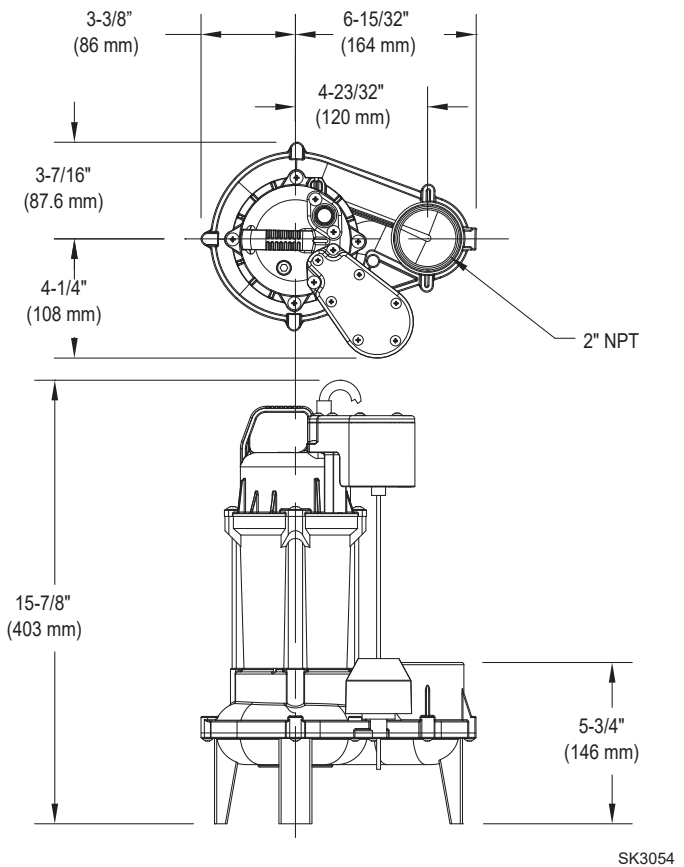

FM2962
0224
Supersedes
0123



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).