


Hydrostatic Test Pump

FOR PRESSURE TESTING WATER MAINS

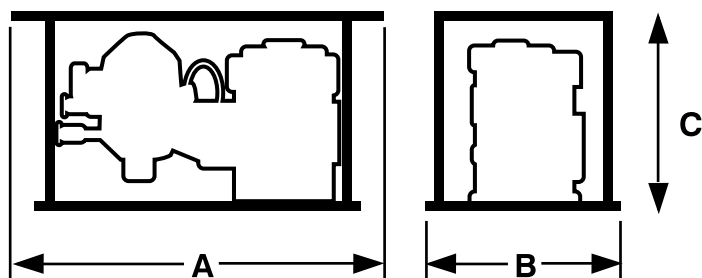

Physical Specifications (See illustration above)


Dimension	HTP10-500 & 500H	HTP23-700H
A	36"	37"
B	17"	22"
C	16"	31"
Weight	130 LBS.	210 LBS.

Engine Specifications

Feature	HTP10-500H	HTP23-700H
Engine	Honda GX 160 5.5 HP	Honda GX 390 13 HP
RPM	3600	3600
Gas Tank Capacity	0.82 US gal	1.61 US gal

Performance Specifications

Description	HTP10-500 & 500H	HTP23-700H
GPM	9.5	27.9
PSI	580	725

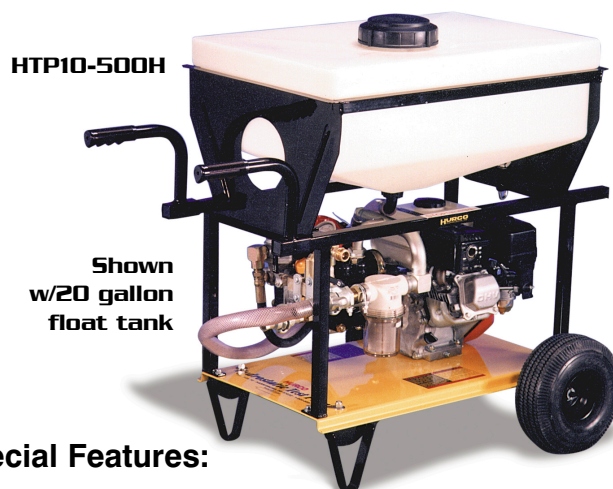

Special Features:

- All pumps utilize Buna-N diaphragms.
- In-Line Strainer.
- Silicone Filled 600 PSI Test Gauge.
- Integral Control Unit for fail-safe operation.
- Accumulator Diaphragm removes pulsations.
- Enclosed Gear Reduction leaves no exposed moving parts.
- Welded Tubular Steel Frame with Steel Base.
- 10' of 1" suction hose for HTP10-500 and 500H.
- 10' of 1 1/2" suction hose for HTP23-700H.
- 12' of 1/2" pressure hose.
- One piece manifold system for inlet and outlet. (Reduces leak points and makes repairs easier.)
- Durable baked-on Powder Coat Finish.
- Freeze warning - Liquid Crystal Temperature Indicator.
- Float Controlled Water Reservoir (HTP10-500H only).



HURCOTECH.COM
800-888-1436

HURCO
TECHNOLOGIES, INC.®